



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25

-



"

"

...

78

"

"

OHSAS18001 ISO14001

) IMS

(ISO/TS:2002 ISO9001:2000

:

ECER83/03

20

CO

14

NO_x + HC




B2000i
1383

(2 1
(2 2
(2 3
(2 4
(2 5
(2 6

()

4820 mm
1620 mm
1900 mm
2865 mm
1300 mm
1300 mm
1130 mm

(3 1
(3 2
(3 3
(3 4
(3 5
(3 6
(3 6

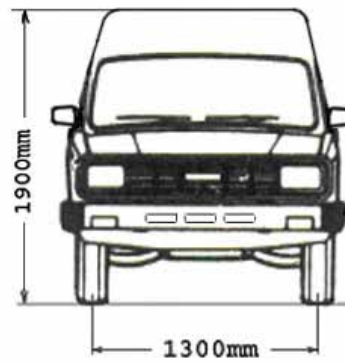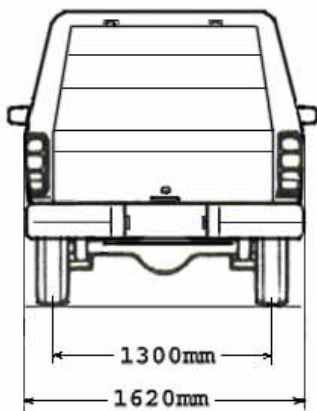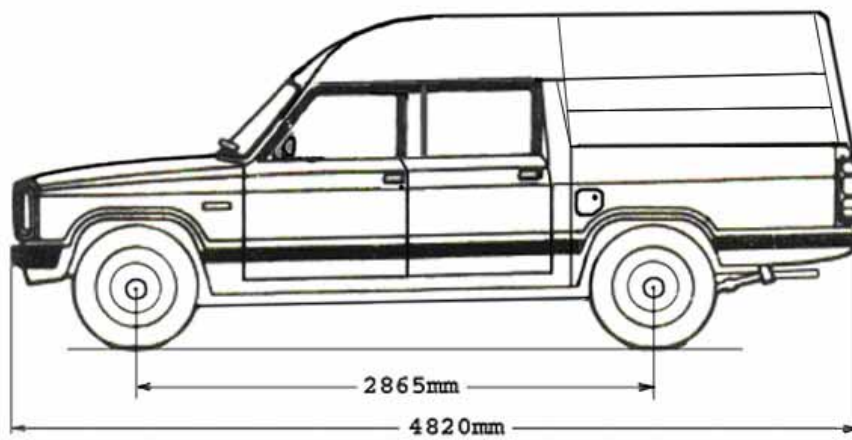

()

1480 kg

(5 1

2400 kg

(5 2

	5	(6 1
1	4	(6 2
	4	(6 3
		(6 4
		(6 5
		(6 6
		(6 7
		(6 8
		(6 9
		(6 10
		(6 11
		(6 12
		(6 13
-		(6 14

E.C.U





()

U

4380 mm

1000 mm

SAPH32

6

4

(8 1

(8 2

(8 3

(8 4

(8 5

(8 6

(8 7

2	(9 1
	(9 2
	(9 3
	(9 4
	(9 5
	(9 6
4.875	(9 7
730 kg	(9 8
750 kg	(9 9
6.50-14	(9 10
4.5J×14	(9 11
30 psi	(9 12
35 psi	(9 13

			(10 1
			(10 2
			(10 3
			(10 4
			(10 5
			(10 6
	53	33	(10 7
	38	32	(10 8
	400 mm		(10 9
			(10 10
		4.12	(10 11
		0-6 mm	(10 12
30 -20		45	(10 13
20 -20		1	(10 14

(12 1

(12 2

(12 3

(13 1

(13 2

(13 3

-

(13 4

14 1

R134a

(14 1 1

(14 1 2

(14 1 3

1

(14 1 4

(14 1 5

14 2

(14 2 1

(14 2 2

4

(14 2 3

(14 2 4

1

60A-12V	(15 1
0.95 kW-12V	(15 2
60 A.h-12V	(15 3
12 kV-12V	(15 4
	(15 5
-	(15 6

	(16 1
-	(16 2

FE CIS	(17 1
	(17 2
4	(17 3
86 mm	(17 4
86 mm	(17 5
1998 cc	(17 6
8.6:1	(17 7
70.1 kW at 5000 rpm	(17 8
151 N.m at 2500 rpm	(17 9
685×552×654 mm	(17 10
	(17 11



—

(19 1

(19 2

(19 3

—

5

(20 1

(20 2

(20 3

4.451	1
2.686	2
1.589	3
1.000	4
0.874	5
4.292	

—

(21 1

(21 2)

	(22 1)
	(22 2)
1.7L	(22 3)
	(22 4)
1.7 kW	(22 5)
1.2 kW	(22 6)
wax pellet type	(22 7)
82°C	(22 8)

160 km/h	(23 1)
5.8 m	(23 2)

4.2L±0.3L	SAE 20W40(15W-20)(SG Grade)	(24 1)
3.9L	SAE 20W40(15W-20)(SG Grade)	(24 2)
2L±0.1L	GL4 or GL5 SAE 75W90	(24 3)
1.3L±0.1L	GL5 SAE90	(24 4)
0.5L	C-BF-25	(24 5)
66L	UNLEADED PETROL	(24 6)
0.6L±0.1L	C-FL-12	(24 7)

7.9L±0.2L

(24 9

—



(25 1

(25 2

(25 3

(25 4

(25 5

—





