



:

-



1383

(
(
(
(
(
(
(

()

4725 mm
1775 mm
1900 mm
2725 mm
1465 mm
1480 mm
205 mm

(
(
(
(
(
(
(

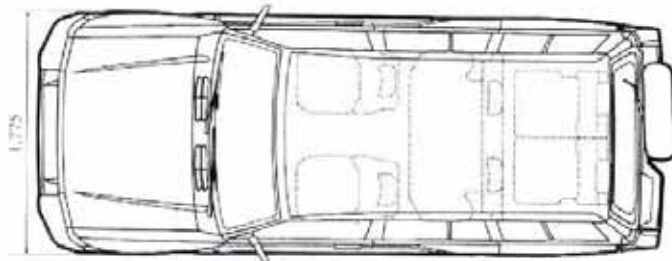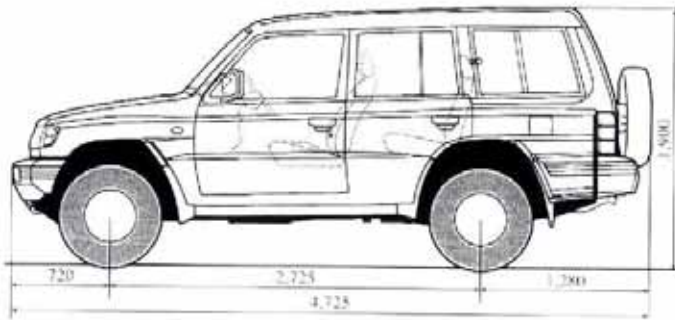

mm





2

(
(
(
(
(

265/70 R 15

(
(

265/70 R 15

(

7.00 JJ-15 Light Alloy

(

Ball & Nut (P/S)

(
(
(
(
(
(
(
(

$\approx 3\frac{3}{4}$

(

(
(
(

(
(
(
(

15

()

15 inch

(
(

(
(
(

R134a

14

19

()

(
(
(
(
(
(
(

2

(
(
(
(



90A -12V ()
1.2Kw -12V ()
65 D23R(52AH/5HR) ()
Mold 3 coil F-722 ()
- ()
- ()
- ()

ECI-MULTI

650 750 ()
2 8 ()
324-343 ()

V63500ccECI-MULTI

24 ()
6 ()
93 mm ()
84.5 mm ()
3497 cc ()
9.5:1 ()
143Kw in 5000RPM ()
313 N.m in 3500 rpm ()
"V" ()

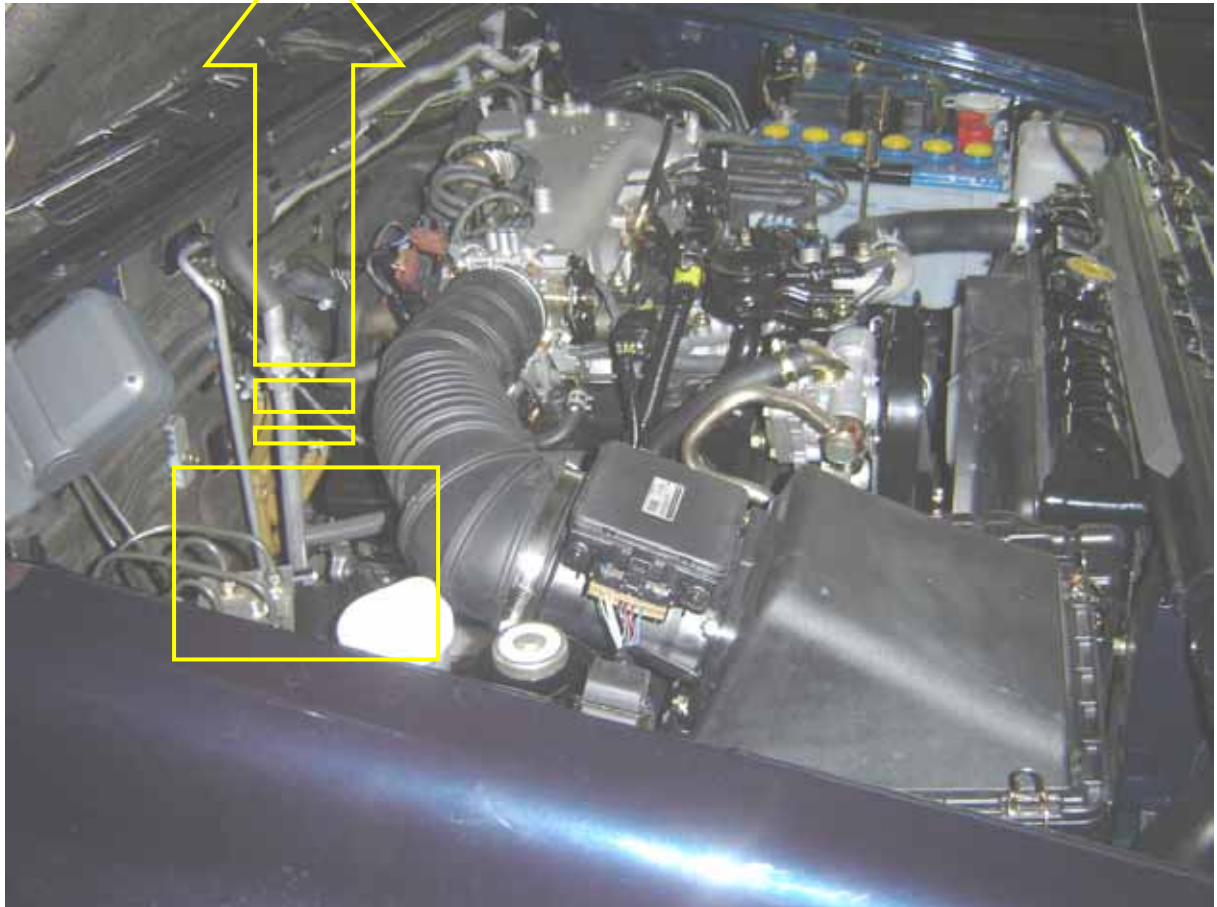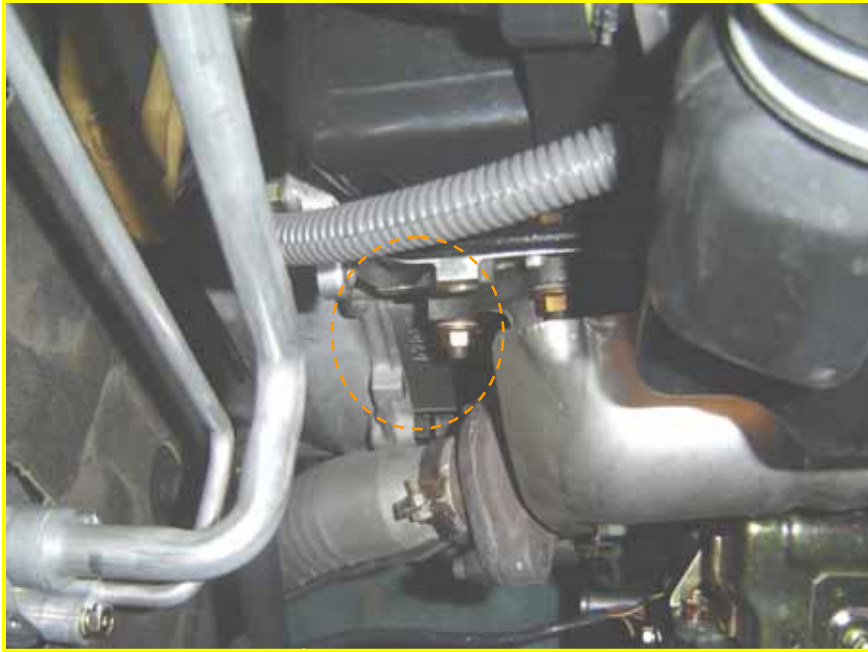

() -

250×160

(
(
(

-

(

V5M31

(
(
(

3.952	
2.238	
1.398	
1.000	
0.819	
3.553	

1.000	
1.900	

Transfer Case

(

(

V4AW3

(
(
(

2.804	
1.531	
1.000	
0.754	
2.393	

Transfer Case

1.000	
1.900	

—

6L
75-105 kPa

wax type with jiggle valve

82° c

100° c

—

185 Km/h

180 Km/h

5.9 m

11.3 s

13.1 s

(

(

(

(

(

(

(

(

(

(

(

(

(

(

(

(

(

(

(

—

4.9 dm³	SAE 15w-40 or 15w-50	(
3.7 dm³	SAE 75w-90w or 75w-85w API GL4	(
9.8l	ATF-Dexron II	(
92l	UNLEADED PETROL	(
1.2l		(

—

(
(
(
(
(
(
(
(

—



